

MULTIOBJECTIVE GA-FUZZY LOGIC CONTROLLER

Applied to a pH Reactor

Orlando Reyes

Universidad Simón Bolívar, FEI, Dpto. De Tecnología Industrial, Calle Unibolivar, Baruta, Caracas, Venezuela
orlandoreyes@usb.ve

Gustavo Sánchez, Miguel Strefezza

Universidad Simón Bolívar, MYS, Dpto. De Procesos y Sistemas, Calle Unibolivar, Baruta, Caracas, Venezuela
gsanchez@usb.ve, strefezza@usb.ve

Keywords: Genetic Algorithm, Multi-objective Optimization, Fuzzy Logic Controller.

Abstract: A Takagi-Sugeno (T-S) Fuzzy Logic Controller (FLC) is tuned using the algorithm NSGA-II. The proposed method eliminates laborious design steps such as tuning of membership functions and conclusion table parameters. An object approach representation is used to build an adequate FLC representation. Object is an individual abstraction in order to improve crossover a mutation operators. The Genetic Algorithm optimization is carry out over signal response performance parameters, in this work: settling time, rise time, overshoot and steady state error. Experiments show how the algorithm reached good response of some individuals in solution set, typically called Pareto frontier.

1 INTRODUCTION

pH control is a difficult benchmark problem due to the nonlinearity and sensibility near the neutral point. Control engineers would like to keep a desirable set-point, rejecting disturbances and tracking a reference signal.

FLC tuned via Genetic Algorithm (GA) to control a pH reactor have shown good results in the unconstrained case. In (Reyes *et al*, 2008) an object approach was proposed to obtain the FLC parameters, optimizing a scalar objective function based on the loop error. The authors have also used the sum of Rise time (Rt), Settling time (St), Overshoot (Os) and Steady state error (Sse) as a fitness function.

The indicators Rt, St, Os and Sse measure the performance of a system response and could be in possible conflict. If we try to minimize one, another or the rest of metrics could increase. Real problems involve more than one objective. Multiobjective evolutionary techniques try to find the Pareto frontier in the objective space (Coello, 2004), and the control designer has to choose the best trade-off for a given application.

2 MOEA

A multiobjective problem seeks to optimize the components of a vector-valued objective function. Unlike the single objective optimization the solution to this problem is not a single point, but a family of points know as the Pareto-optimal set (Tamaki *et al*, 1996). A multiobjective problem state can be stated as:

$$\begin{aligned} \text{Min } \mathbf{f}(\mathbf{x}) &= \{f_1(\mathbf{x}), \dots, f_i(\mathbf{x}), \dots, f_n(\mathbf{x})\} \\ \text{s.t. } \mathbf{x} &\in \mathbf{D} \\ \mathbf{D} &= \{ \mathbf{x} \in \mathbb{R}^n: g_j(\mathbf{x}) \leq 0, j = 1, \dots, J; \\ &h_k(\mathbf{x}) = 0, k = 1, \dots, K \} \end{aligned} \quad (1)$$

Several MOEAs have been proposed to solve problem (1). In this work we propose to use the Non dominated Search Genetic Algorithm (NSGA-II). It initiates with a random population in the search space, process follow assigning a particular rank to the sequential Pareto surfaces generated plotting $f_i(\mathbf{x})$ in the objectives space. After ranking assigned to every individual other important parameter called crowding distance tells how population density is or individuals are scattered in objective space in a particular Pareto frontier. The tournament process chooses the best individuals and after a default

number of generations the algorithm stops. NSGAI gives a set of solutions or Pareto surface. Researchers use it if objectives to be optimized are in conflict, thus no best or unique solution exist like in a Simple Genetic Algorithm where a unique solution is achieved.

3 CONTROLLER

Next, a briefing about Fuzzy Logic (FL), GA and MOEA applied to this particular problem is presented.

3.1 Fuzzy Logic

The Fuzzy Logic concept was proposed in a seminal paper written in 1965 by Lofti A. Zadeh. One of the first Fuzzy Logic Controlles (FLCs) was developed by (Mandani & Assilian, 1975), attempting control the speed of a steam engine.

An important issue in FLC design is searching for adequate and if possible good parameters for both membership functions and conclusion tables. Heuristic techniques are useful to perform this task. A FLC consists of a rule set that, in a linguistic manner, tells how the system must work. The output of the FLC will be the control action. Linguistic rules are constructed like statements, with cause and consequences, as follows:

IF cause_1 **AND** cause_2 **THEN**
consequence_1 **AND** consequence_2

In this work the defuzzification process is carried out following the Takagi-Sugeno (T-S) method of order zero, with five membership functions for each input, and twenty five rules. Because is easy to program and is faster than Mamdani method. The FLC output is calculated using the weighted averaging defuzzification method (see eq. 2).

$$CF_i = \frac{\sum \alpha_j * C_{i,j}}{\sum \alpha_j} \tag{2}$$

where:

$C_{i,j}$: conclusion i , rule j; α_j : activation degree of rule j;

CF_i : defuzzificated (crisp) value.

An extended FLC review, presented in (Gang Feng, 2006), gives the reader a clue of their broad application.

Rules are created with all possible combinations between Error and Derror fuzzy values. **NB**: Negative Big, **NS**: Negative Small, **Z**: Zero, **PS**: Positive Small, **PB**: Positive Big.

IF Error is **NB AND** Derror is **PB THEN** $C_{i,1}$

: : : : : : : : : : :

IF Error is **PB AND** Derror is **NB THEN** $C_{i,25}$

Next table show how to construct the rules.

Table 1: Rule table, i = 1 affects valve of acid, i = 2 otherwise.

Error \ Derror	NB	NS	Z	PS	PB
PB	$C_{i,1}$	$C_{i,2}$	$C_{i,3}$	$C_{i,4}$	$C_{i,5}$
PS	$C_{i,6}$	$C_{i,7}$	$C_{i,8}$	$C_{i,9}$	$C_{i,10}$
Z	$C_{i,11}$	$C_{i,12}$	$C_{i,13}$	$C_{i,14}$	$C_{i,15}$
NS	$C_{i,16}$	$C_{i,17}$	$C_{i,18}$	$C_{i,19}$	$C_{i,20}$
NB	$C_{i,21}$	$C_{i,22}$	$C_{i,23}$	$C_{i,24}$	$C_{i,25}$

Defuzzification is done calculating CF_1 : conclusion at flow 1 and CF_2 : conclusion at flow 2, with the equation 2. Where α_j is the max value between both membership degree Error and Derror at the FLC input.

3.2 Genetic Algorithm

A Genetic Algorithm (Holland, 1975), (Golberg, 1953) is an iterative stochastic optimization process based in how the nature selects the best individual to survive within a given environment. They are now accepted by both the optimization and control communities to solve problems for which classical methods (i.e mathematical programming) can not be used or are not efficient enough. A GA starts with a scattered random population in a bounded space. An adaptation (or fitness) value is assigned to every individual. Fitness will be used to give a selection probability for crossover, survivor or mutation operations. The choice of the best individuals for crossover will give good “chromosomes” to children. Mutation prevents premature convergence relocating individuals. The process is iterated with the hope to obtain better individuals when algorithm stops.

3.3 NSGAI Procedure

Multiobjective problem (see eq. 1) start determining searching space and spreading a randomly population in it. Every individual is a FLC who’s chromosomes are defined with membership functions and conclusion tables parameters. In simulation, individuals have it fitness vector composed of {Rt, St, Os, Sse} (eq. 3), those are objective space dimensions in where the individual “adaptation” is plotted.

$$\begin{aligned} \text{Min } \mathbf{f}(\mathbf{x}) &= \{\text{Rt}(\mathbf{x}), \text{St}(\mathbf{x}), \text{Os}(\mathbf{x}), \text{Sse}(\mathbf{x})\} \\ \text{s.t. a } \mathbf{x} &\in \mathbf{D} \\ \mathbf{D} &= \{\mathbf{x} \in \mathbb{R}^n\} \end{aligned} \quad (3)$$

Where x are membership functions and conclusion table parameters.

Individuals of population in objective space have its particular Rank (R) and crowding distance (cd).

Rank is equal to one if individual belongs to Pareto Frontier (PF), later those are removed and the sequential individuals continue with rank two and so on, this process discriminates several local PF. Rank assignment is done by PF definition (Augusto *et al.*, 2006), consider two solutions vectors \mathbf{x} and \mathbf{y} , \mathbf{x} is contained in the PF if.

$$\begin{cases} \forall i \in 1,2,\dots,k : f_i(\mathbf{x}) \leq f_i(\mathbf{y}) \\ \text{and} \\ \exists j \in 1,2,\dots,k : f_j(\mathbf{x}) < f_j(\mathbf{y}) \end{cases} \quad (4)$$

In the case of (4) \mathbf{x} dominates \mathbf{y} in the \mathbb{R}^k objective space and has Rank one.

Crowding distance is the distance between one individual and two near it in the same PF (see eq. 5).

$$cd_i = \sum_{p=1}^{p=m} \sqrt{\sum_{c=1}^{c=n} (X_{cp} - X_{ci})^2} \quad (5)$$

Where c is an objective space axis and n are the number of the objectives; p is a particular point and m are the total points in the same Pareto Frontier; i is the individual.

Binary selection is carried out and tournament is done first by Rank. Individuals with minor Rank are preferred, if both have equal R, cd is taken into account, mayor cd wins the tournament to preserve population diversity, two individuals are then selected by this process for crossover and mutation.

Simulated binary crossover (Deb & Agrawal, 1995) makes information interchange, and to avoid premature convergence polynomial mutation works well (see eq. 6).

$$c_k = p_k + (p_k^u - p_k^l) \delta_k \quad (6)$$

where k is the vector k -component, c is the child, p the parent δ a uniform random number u and l are the upper and lower bounds in the search space.

New and old population are joined and selected via tournament to conform the new generation, and then survivors could appear. The process is repeated until reach the maximum number of iterations.

In a previous work, population of the Initial Individuals were created with restrictions in

membership functions (Reyes *et al.*, 2008) in hope of avoid overlapping or empty space but no restrictions were imposed while NSGAI was running, thus membership functions at the end shown empty space in discourse universe, overlapping or both mixed cases (Fig. 2,3).

4 PH REACTOR

The equations for the pH dynamic were developed in (McAvoy *et al.*, 1975). The main issue is to keep the process around the neutral point, where the system is very sensitive and highly non linear, then pH control is regarded as a benchmark problem, especially when the reference signal change from pH=7 to a mayor value nearby. The interested reader can easily verify this fact by the construction of the neutralization or titration curve (TC). An experimental method to obtain the TC is based on holding the base concentration constant, slowly adding the acid and then plotting the pH versus the acid concentration. Three operating zones are commonly considered: low, medium, high (see Fig 1).

pH is usually controlled by the mixture of two solutions with different concentrations, one basic and other acid. In this work, we validated our SIMULINK® model by comparing the resulting TC with the one presented in (Zhang, 2001).

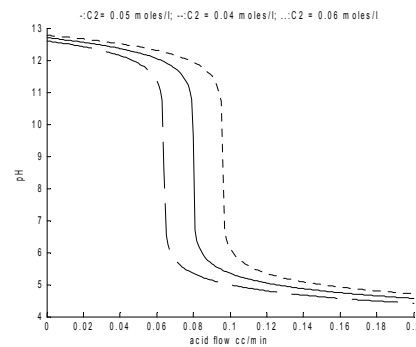


Figure 1: Titration curve, zones low, medium, high, pH approximately 0~6, 6~11.5, 11.5~14, respectively.

The neutralization process takes place within a Continuous Stirred Tank Reactor (CSTR). There are two flows to the CSTR. One is acetic acid of concentration C_1 at flow rate F_1 , and the other is sodium hydroxide of concentration C_2 at flow rate F_2 .

The mathematical equations of the CSTR are shown in eq's 7-12.

Table 2 shows the parameters and model variables.

Table 2: Description and values for parameters and variables.

Name	Description	Value
V	Volume of tank	1 L
F_1	Flow rate of acid	0.081 L/min
F_2	Flow rate of base	0.512 L/min
C_1	Concentration of acid in F1	0.32 mol/L
C_2	Concentration of acid in F2	0.05005 mol/L
K_a	Acid equilibrium constant	1.8×10^{-5}
K_w	Water equilibrium constant	1.0×10^{-14}
$[H^+]$	Hydrogen ion	-
$[HAC]$	Acetic acid	-
$[AC^-]$	Acetate ion	-
$[NA^+]$	Sodium ion	-

$$V \frac{d\xi}{dt} = F_1 C_1 - (F_1 + F_2) \xi \quad (7)$$

$$V \frac{d\zeta}{dt} = F_2 C_2 - (F_1 + F_2) \zeta \quad (8)$$

$$[H^+]^3 + (K_a + \zeta)[H^+]^2 + \{K_a(\zeta - \xi) - K_w\}[H^+] - K_w K_a = 0 \quad (9)$$

$$pH = \log_{10}[H^+] \quad (10)$$

$$\xi = [HAC] + [AC^-] \quad (11)$$

$$\zeta = [NA^+] \quad (12)$$

5 EXPERIMENT RESULTS

The experiment was done using MATLAB® and SIMULINK®, starting parameters are shown in table 3, they were defined by trial and error of several experiments.

Following results were obtained from PF set for the individual with minimum Sse (see Table 4). After algorithm run designer choose what is more convenient as desire system response, other values could be refined if minimum of more than one objective if required.

Table 3: Input parameters to the NSGAI.

Parameter	Value
Generations	25
Individuals	30
Crossover probability	0.8
Mutation Probability	0.01
Error Domain	[-10 10]
Rate of error Domain	[-10 10]
Conclusion Domain at inlet 1	[0 7]
Conclusion Domain at inlet 2	[0 7]

Values of membership functions parameters for error

-10.00 -5.95	Left trapeze
-9.75 -6.39 2.42	Triangle
-6.31 7.65 7.80	“
-4.79 -3.25 4.20	“
5.84 10.00	Right trapeze

Figures 2 show the final distribution of the error membership functions, in where overlapping appear in absent of restrictions while NSGAI was running.

Figures 3 show the final rate of error distribution membership functions, in where empty space and overlapping appear in absent of restrictions while NSGAI was running.

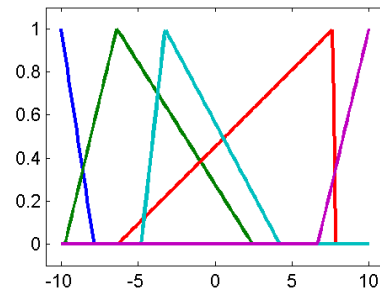


Figure 2: Error membership functions.

Values of membership functions parameters for rate of error

-7.00 -5.10	Left trapeze
-6.87 -5.86 -3.21	Triangle
0.67 0.92 2.77	“
-0.15 5.14 6.73	“
5.80 7.00	Right trapeze

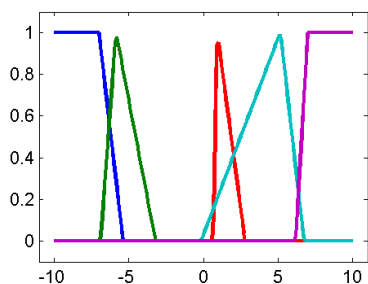


Figure 3: Rate of error membership functions.

Consequence values (according to Table 1) are used in the FLC to get and adequate system response.

Consequence matrix, flow 1

6.23	6.98	6.17	5.17	4.39
5.35	4.93	2.46	4.25	2.48
0.97	1.04	2.95	3.61	0.18
3.01	6.20	6.22	5.31	2.72
0.48	2.73	0.84	1.14	6.48

Consequence matrix, flow 2

5.40	0.08	2.01	5.63	5.94
1.98	0.11	3.63	5.45	5.14
5.82	5.97	6.89	2.90	6.59
6.23	0.05	0.70	2.40	0.15
6.31	3.81	4.43	0.44	4.80

Table 4: Objectives to the individual with minimum Sse NSGAI.

Objective	Value
Settling time	2.0511
Undershoot	2.5918
Overshoot	0.1158
Rise Time	3.4483e-004
Steady State Error	0.0217

System response with FLC parameters at the final of the NSGAI run do its job following reference signal and disturbance rejection near neutral point (Fig. 4-6).

Os and Sse where the only objectives in conflict as show in Fig 7. against other objectives combined and that's why there aren't shown here.

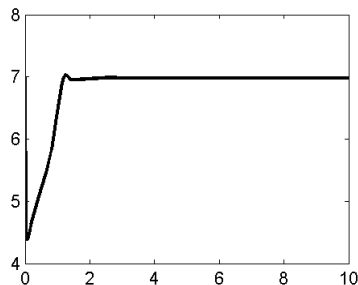


Figure 4: System response pH vs time.

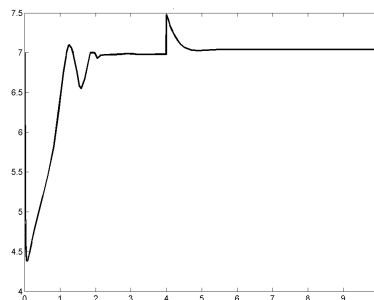


Figure 5: Disturbance Rejection.

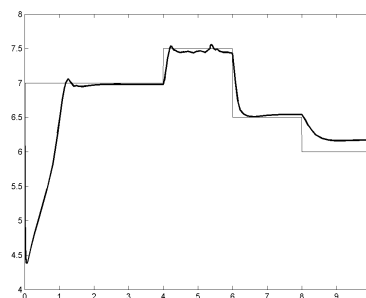


Figure 6: Signal tracking.

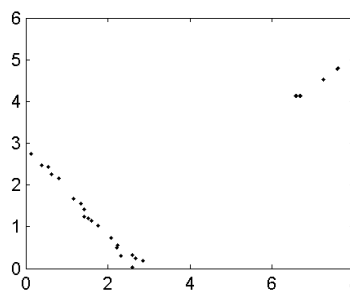


Figure 7: Space Os vs Sse.

6 CONCLUSIONS

Multiobjective Evolutionary Algorithms in the case of NSGAI is an excellent tool to find FLC membership functions and conclusion table parameters, especially is control designer wants to refine one objective on case depending. The method gives a population of FLC to choose a desired one, additionally shows what objectives are opposed.

Parameters in table 3 are subject of discussion with more intensive run of the whole algorithm.

The algorithm is very slow, every individual of population must be simulated also fitness assigned, and is necessary a lot of computer resource but is achieved of line.

7 FUTURE WORK

Basic restrictions would be imposed to obtain more homogeneous membership functions distribution, avoiding overlapping and empty space in discourse universe in membership functions.

Program Mamdani method applying restrictions in consequence and compare difference in response.

Algorithm stop criteria must be implemented to compare it with other MOEA in order to establish performance metrics.

Proceedings of Parallel Problem Solving From Nature VI Conference, pp 849-858.

- O.B. Augusto, S. Rabeau, Ph. De'pince, F. Bennis. 2006. Multi-objective genetic algorithms: a way to improve the convergence rate. *Engineering Applications of Artificial Intelligence* 19, 501–510
- H. Tamaki, H. Kita, and S. Kobayashi. 1996. Multi-objective optimization by Genetic Algorithms: A review. *IEEE Proc. Int. Conf. Evolutionary Computation*, 517–522

REFERENCES

- Reyes, O., Sanchez, G., Strefezza, Miguel, 2008. Usign Genetic Algorithms to design a Fuzzy Logic Controller for a pH Reactor: an Object Approach. "IASTED International conference, Quebec City, Canada Control and Applications (CA 2008) May 26-28", *Proceedings of the xxx conference IASTED*. <http://www.actapress.com/Abstract.aspx?paperId=33609>
- L. A. Zadeh. Fuzzy Sets. 1965. *Information and Control Vol 8*. 338-353.
- E. H. Mamdani and Assilian. 1975. An Experiment In Linguistic Synthesis with a Fuzzy Logic Controller. *Int. Man Mach Stud Vol. 7*. 1-13.
- Moore, R., Lopes, J., 1999. Paper templates. In *TEMPLATE'06, 1st International Conference on Template Production*. INSTICC Press.
- Smith, J., 1998. *The book*, The publishing company. London, 2nd edition.
- E. H. Mandani and S. Assilian. 1975. An Experiment In Linguistic Synthesis with a Fuzzy Logic Controller, *Int. J. Man Mach. Stud. Vol. 7*. 1-13.
- Holland, J. *Adaptation in Natural and Artificial Systems*. 1975. *University of Michigan Press, Ann Arbor*.
- David E. Golberg, *Genetic Algorithms in Search Optimization & Machine Learning*. 1993. *Addison Wesley Longman Inc*.
- Gang Feng. 2006. A Survey on Analysis and design of Model-Based Fuzzy Control Systems. *IEEE Transactions on Fuzzy Systems*, 14(5).
- McAvoy, T. J.; Hsu, E.; Lowenthal, S. 1975. Dynamics of pH in a Controlled Stirred Tank Reactor. *Ind. Eng. Chem. Process Des. Dev.* 11. 68–70.
- Zhang, J. 2001. A Nonlinear Gain Scheduling Control Strategy Based on Neuro-Fuzzy Networks. *Ind. Eng. Chem. Res.* 40. 3164–3170.
- Carlos A. Coello Coello. 2004. Recent Trends in Evolutionary Multiobjective Optimization. *Evolutionary Multiobjective Optimization Theoretical Advances and Applications*. Springer. ISBN 1-85233-787-7.
- Deb, K.; Agrawal, S.; Pratab, A. & Meyarivan, T. 2000. A Fast Elitist Non-Dominated Sorting Genetic Algorithm for Multiobjective Optimization: NSGAI.